



BKC/G15.0 系列 15000N

BBK-JINGBA
模具氮气弹簧


1. 如果超过行程范围S使用, 则会导致气体溢出。请务必在行程范围内使用, 以免触到泄压衬套。
2. 禁止利用前端工艺孔(M)进行固定或安装接长销。

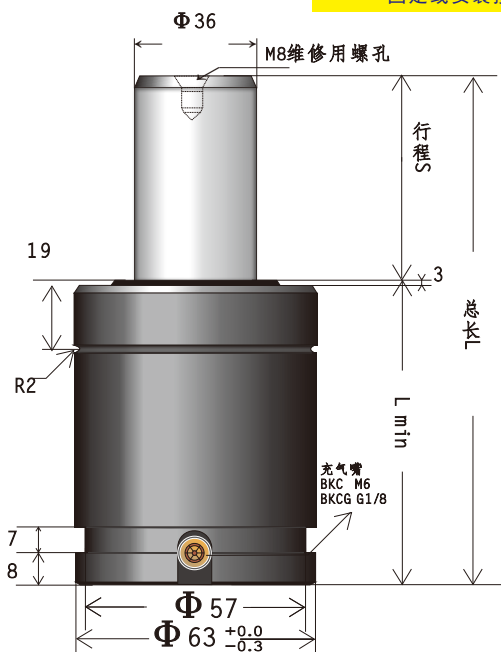


超短强力型氮气弹簧

基本技术参数

公称弹压力.....15000N
最大充气压强...15Mpa
最小充气压强...2.5Mpa
最大工作速度...≤0.8m/s
工作介质.....氮气 (N₂)
工作温度范围...-20 ~ +80°C
单位温度压力变化率...±0.3%/°C
推荐工作频率...6 ~ 30次/min

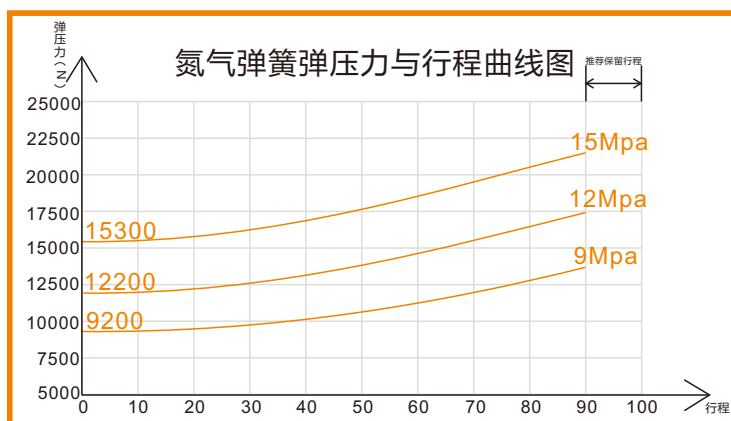

安装方法:

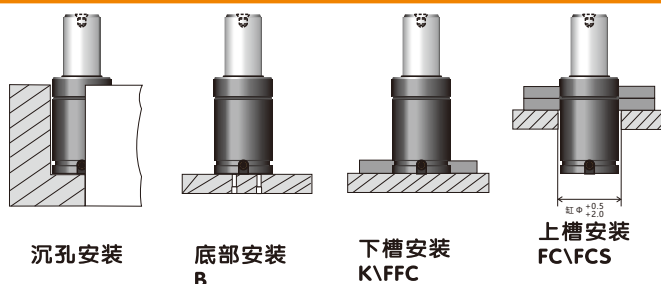


规格型号	行程	总长L	Lmin
★BKC15.0-010-064	10	64	54
BKC15.0-013-070	13	70	57
BKC15.0-016-076	16	76	60
BKC15.0-019-082	19	82	63
BKC15.0-025-094	25	94	69
BKC15.0-032-108	32	108	76
★BKC15.0-035-114	35	114	79
BKC15.0-038-120	38	120	82
★BKC15.0-040-124	40	124	84
★BKC15.0-045-134	45	134	89
BKC15.0-050-144	50	144	94
★BKC15.0-055-154	55	154	99
★BKC15.0-060-164	60	164	104
BKC15.0-063-170	63	170	107
BKC15.0-075-194	75	194	119
BKC15.0-080-204	80	204	124
★BKC15.0-090-224	90	224	134
BKC15.0-100-244	100	244	144
BKC15.0-125-294	125	294	169

规格型号	行程	总长L	Lmin
★BKCG15.0-013-078	13	78	65
★BKCG15.0-016-084	16	84	68
★BKCG15.0-019-090	19	90	71
★BKCG15.0-025-102	25	102	77
★BKCG15.0-032-116	32	116	84
★BKCG15.0-038-128	38	128	90
★BKCG15.0-050-152	50	152	102
★BKCG15.0-063-178	63	178	115
★BKCG15.0-075-202	75	202	127
★BKCG15.0-080-212	80	212	132
★BKCG15.0-100-252	100	252	152
★BKCG15.0-125-302	125	302	177


注:带"★"型号为不常用或非标产品订购时请注意选择

MP

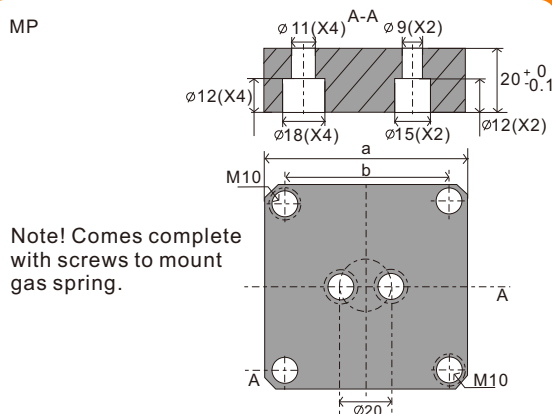


Order No	a	b
MPX-1500	100	73.5

FCX

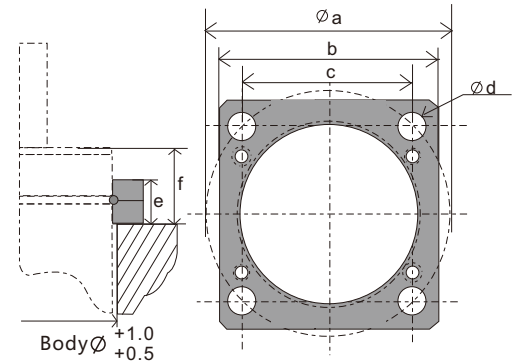

Order No	Ø a	b	c	Ø d	e	f
FCX-1500	104	90	73.5	11	16	27

FFC

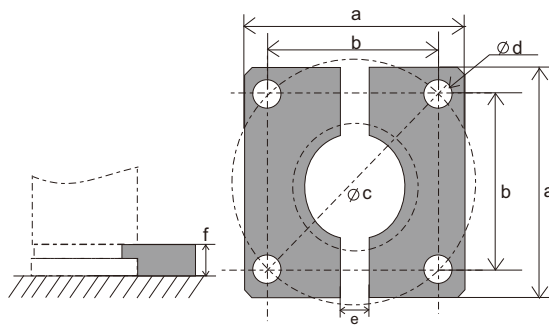

Order No	a	b	Ø c	Ø d	e	f
FFX-1500	100	73.5	104	11	24	12