


BKC1.7系列 1700N

BBK-JINGBA
模具氮气弹簧

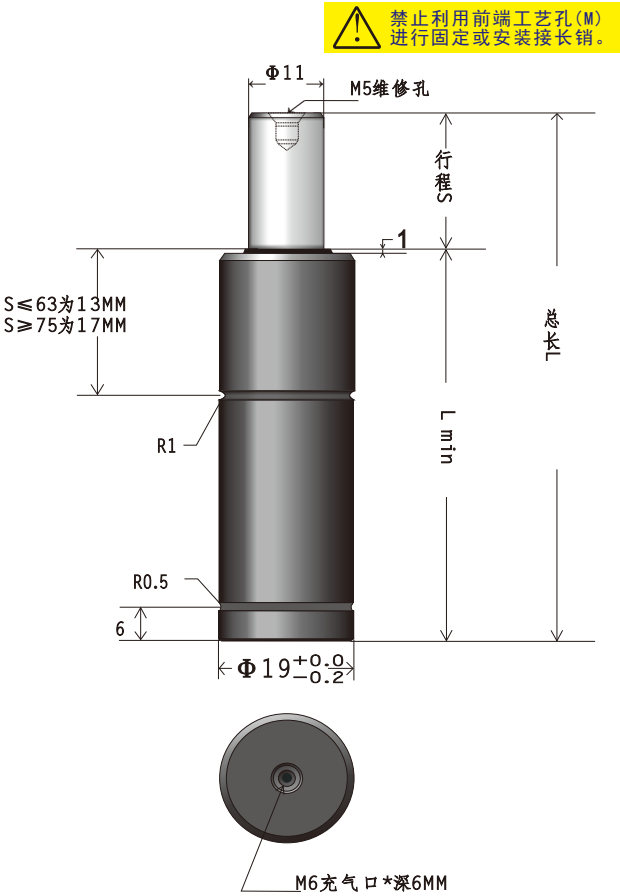


超短强力型氮气弹簧


基本技术参数

公称弹压力.....1700N
最大充气压强...18Mpa
最小充气压强...2.5Mpa
最大工作速度...≤1.2m/s

工作介质....氮气 (N2)
工作温度范围...-20 ~ +80℃
单位温度压力变化率...±0.3%/℃
推荐工作频率...6 ~ 80次/min

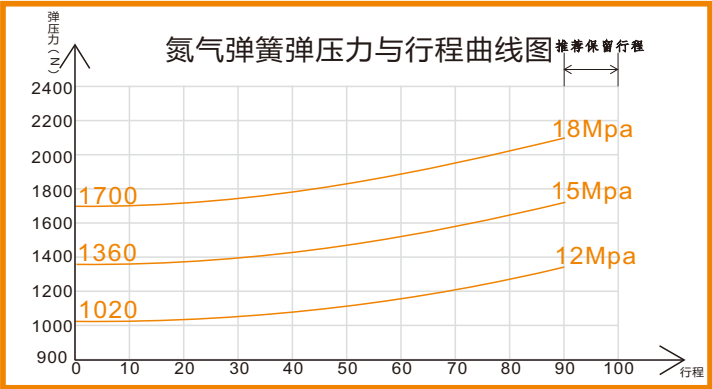


安装方法:

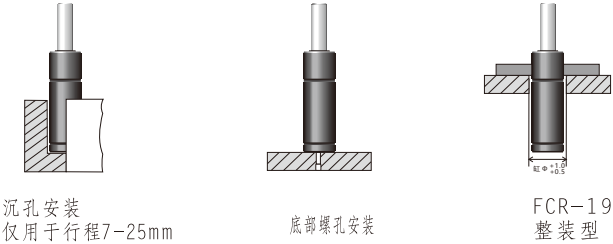

规格型号	行程	总长L	Lmin
BKC1.7-007-044	7	44	37
BKC1.7-010-050	10	50	40
BKC1.7-015-060	15	60	45
BKC1.7-019-068	19	68	49
BKC1.7-025-080	25	80	55
BKC1.7-032-094	32	94	62
BKC1.7-038-106	38	106	68
BKC1.7-050-130	50	130	80
BKC1.7-063-156	63	156	93
BKC1.7-075-185	75	185	110
BKC1.7-080-195	80	195	115
BKC1.7-100-235	100	235	135
BKC1.7-125-285	125	285	160

注:带"★"型号为不常用或非标产品订购时请注意选择

FCR-19
Order No:FCR-19(VDI)

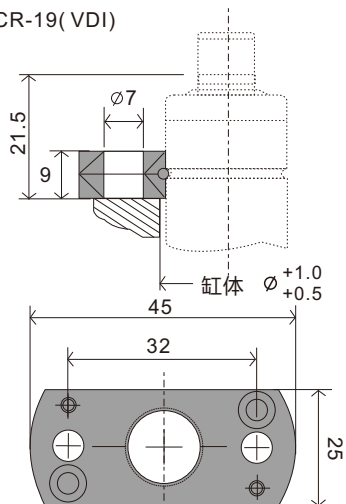

FCR-90
Order No:FCR-90(ISO)

