


BKC/G24.0 系列 24000N

BBK-JINGBA
模具氮气弹簧


1. 如果超过行程范围S使用, 则会导致气体溢出。请务必在行程范围内使用, 以免触到泄压衬套。
2. 禁止利用前端工艺孔(M)进行固定或安装接长销。

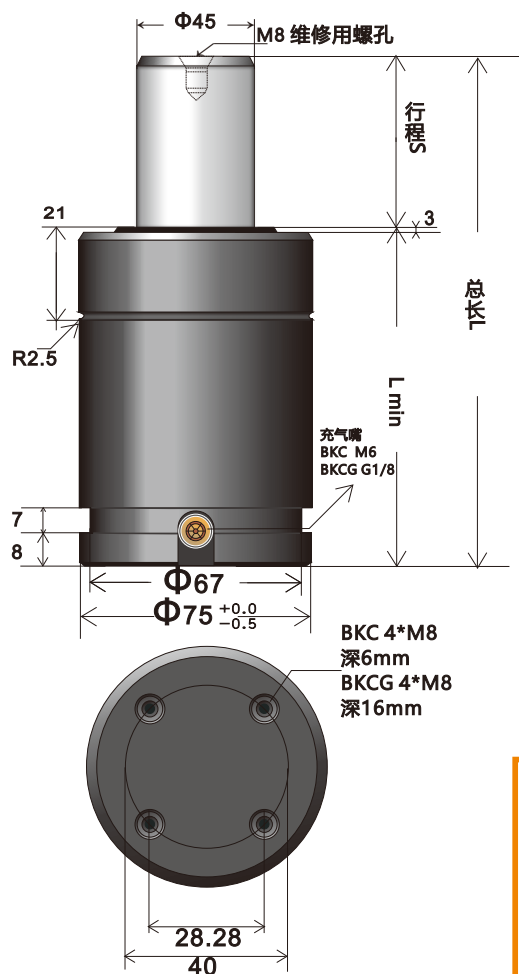


超短强力型氮气弹簧

基本技术参数

公称弹压力.....24000N
最大充气压强...15Mpa
最小充气压强...2.5Mpa
最大工作速度...≤0.8m/s
工作介质....氮气 (N2)
工作温度范围...-20 ~ +80°C
单位温度压力变化率...±0.3%/°C
推荐工作频率...6 ~ 30次/min

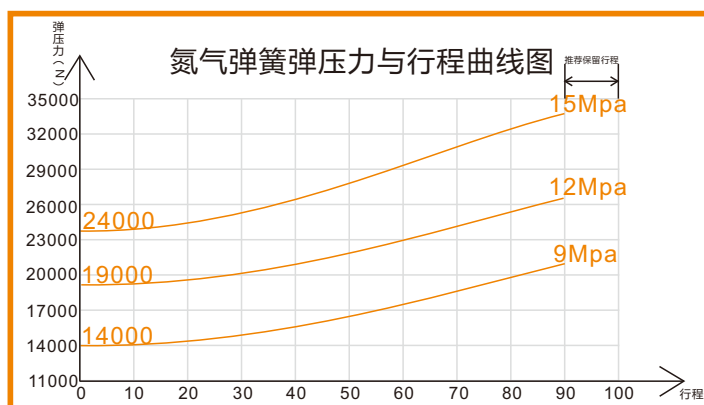

安装方法:

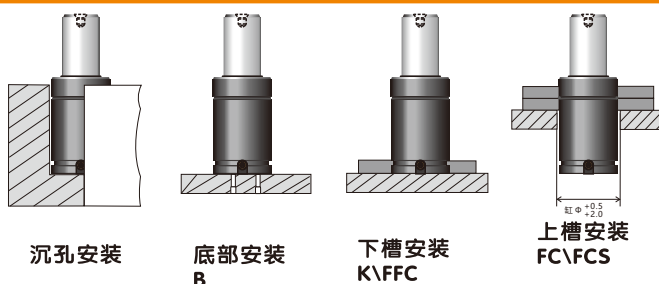


规格型号	行程	总长L	Lmin
★BKC24.0-013-071	13	71	58
BKC24.0-016-077	16	77	61
BKC24.0-019-083	19	83	64
BKC24.0-025-095	25	95	70
BKC24.0-032-109	32	109	77
★BKC24.0-035-115	35	115	80
BKC24.0-038-121	38	121	83
★BKC24.0-040-125	40	125	85
★BKC24.0-045-135	45	135	90
BKC24.0-050-145	50	145	95
★BKC24.0-055-155	55	155	100
★BKC24.0-060-165	60	165	105
BKC24.0-063-171	63	171	108
BKC24.0-075-195	75	195	120
BKC24.0-080-205	80	205	125
★BKC24.0-090-225	90	225	135
BKC24.0-100-245	100	245	145
BKC24.0-125-295	125	295	170

规格型号	行程	总长L	Lmin
★BKCG24.0-016-091	16	91	75
★BKCG24.0-019-097	19	97	78
★BKCG24.0-025-109	25	109	84
★BKCG24.0-032-123	32	123	91
★BKCG24.0-038-135	38	135	97
★BKCG24.0-050-159	50	159	109
★BKCG24.0-063-185	63	185	122
★BKCG24.0-075-209	75	209	134
★BKCG24.0-080-219	80	219	139
★BKCG24.0-100-259	100	259	159
★BKCG24.0-125-309	125	309	184

注:带"★"型号为不常用或非标产品订购时请注意选择


MP

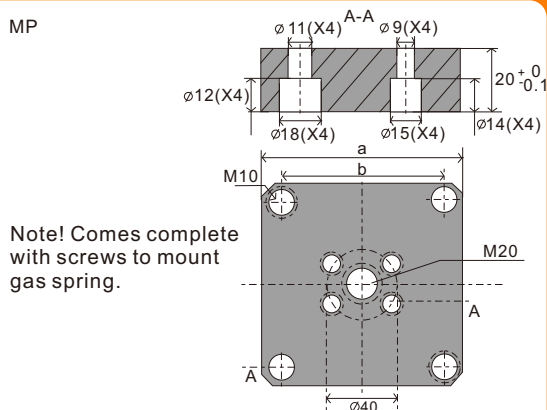

Note! Comes complete with screws to mount gas spring.


Order No	a	b
MP-1500	100	73.5

FC

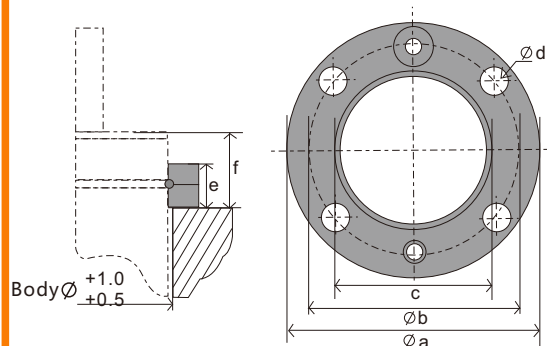


Order No	Ø a	Ø b	c	Ø d	e	f
FC-1500	122	104	73.5	11	16	29

FCS

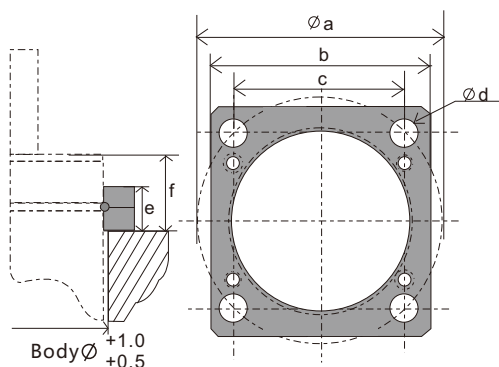

Order No	Ø a	b	c	Ø d	e	f
FCS-1500	104	90	73.5	11	16	29

FFC

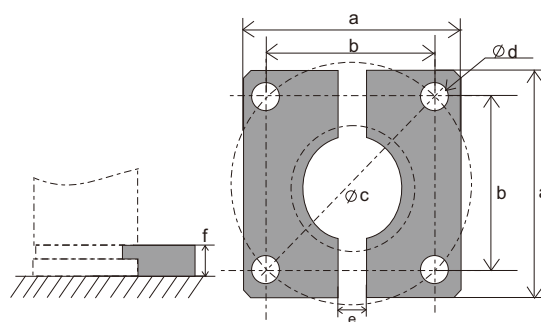

Order No	a	b	Ø c	Ø d	e	f
FFC-1500	100	73.5	104	11	24	12