


BKC/G3.5系列 3500N

BBK-JINGBA
模具氮气弹簧

超短强力型氮气弹簧 BKCG比BKC长10mm安装孔更深




1. 如果超过行程范围S使用, 则会导致气体溢出。请务必在行程范围内使用, 以免触到泄压衬套。
2. 禁止利用前端工艺孔(M)进行固定或安装接长销。


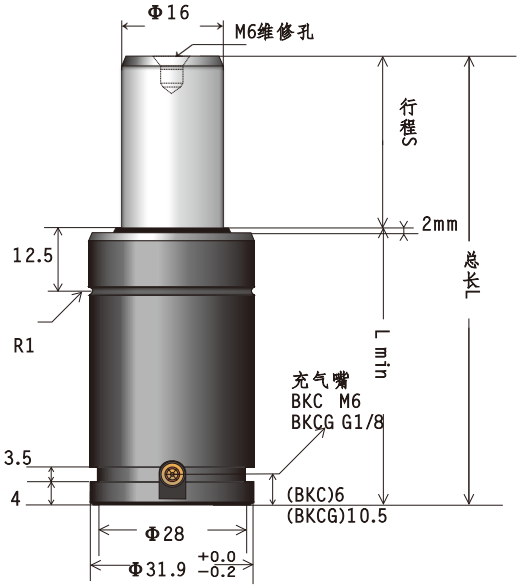


基本技术参数

公称弹力...3500N
最大充气压强...18Mpa
最小充气压强...2.5Mpa
最大工作速度...≤1.2m/s
工作介质...氮气 (N₂)
工作温度范围...-20 ~ +80℃
单位温度压力变化率...±0.3%/℃
推荐工作频率...6 ~ 50次/min

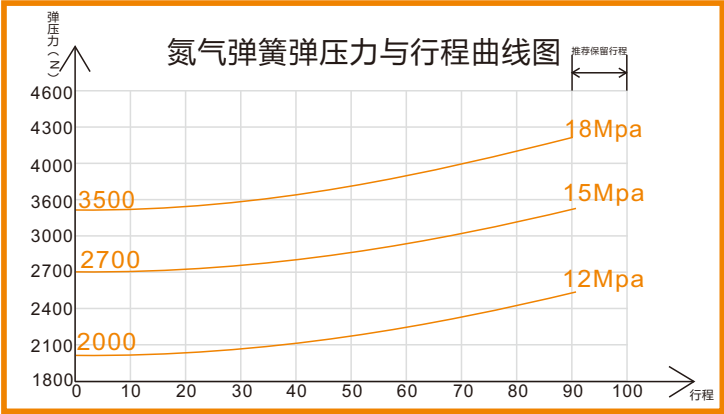

安装方法:

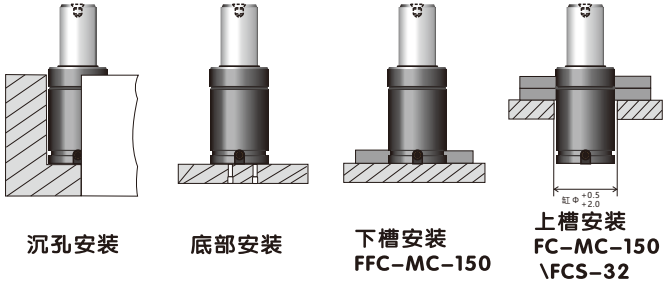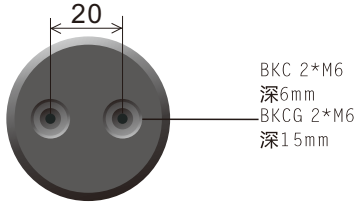


规格型号	行程	总长L	Lmin
★BKC3.5-010-050	10	50	40
BKC3.5-013-056	13	56	43
BKC3.5-016-062	16	62	46
BKC3.5-019-068	19	68	49
BKC3.5-025-080	25	80	55
BKC3.5-032-094	32	94	62
BKC3.5-038-106	38	106	68
BKC3.5-050-130	50	130	80
BKC3.5-063-156	63	156	93
BKC3.5-075-180	75	180	105
BKC3.5-080-190	80	190	110
BKC3.5-100-230	100	230	130
BKC3.5-125-280	125	280	155

规格型号	行程	总长L	Lmin
★BKCG3.5-010-060	10	60	50
★BKCG3.5-013-066	13	66	53
★BKCG3.5-016-072	16	72	56
★BKCG3.5-019-078	19	78	59
★BKCG3.5-025-090	25	90	65
★BKCG3.5-032-104	32	104	72
★BKCG3.5-038-116	38	116	78
★BKCG3.5-050-140	50	140	90
★BKCG3.5-063-166	63	166	103
★BKCG3.5-075-190	75	190	115
★BKCG3.5-080-200	80	200	120
★BKCG3.5-100-240	100	240	140
★BKCG3.5-125-290	125	290	160


注:带"★"型号为不常用或非标产品订购时请注意选择

FC
Order No.FC-MC-150

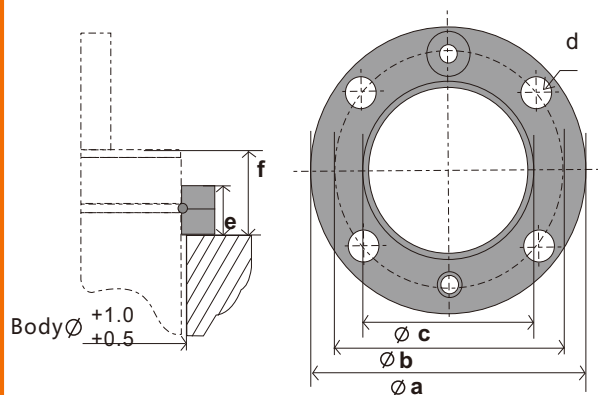


Order No	Øa	Øb	c	d	e	f
FC-MC-150	60	49.5	35	7	9	17

FFC
Order No.FFC-MC-150

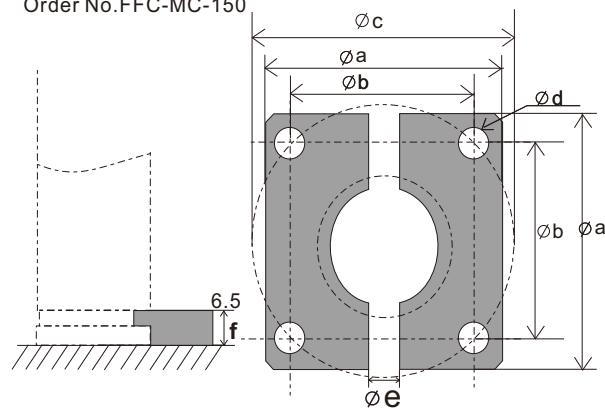

Order No	Øa	Øb	c	d	e	f
FFC-MC-150	50	35	49.5	7	12	6.5

FCS

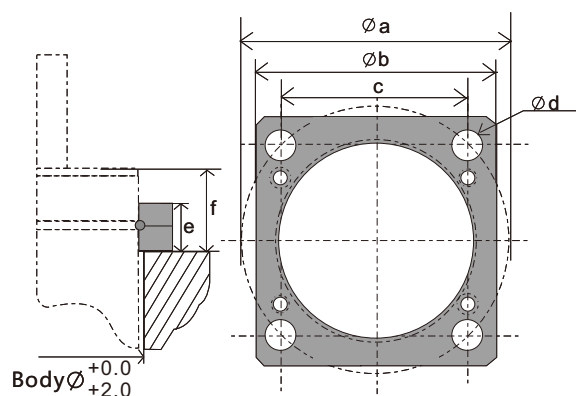

Order No	Øa	Øb	c	d	Øe	f
FCS-32	49.5	45	35	7	9	17