


BKC/G42.0 系列 42000N

BBK-JINGBA
模具氮气弹簧


1. 如果超过行程范围S使用, 则会导致气体溢出。请务必在行程范围内使用, 以免触到泄压衬套。
2. 禁止利用前端工艺孔(M)进行固定或安装接长销。

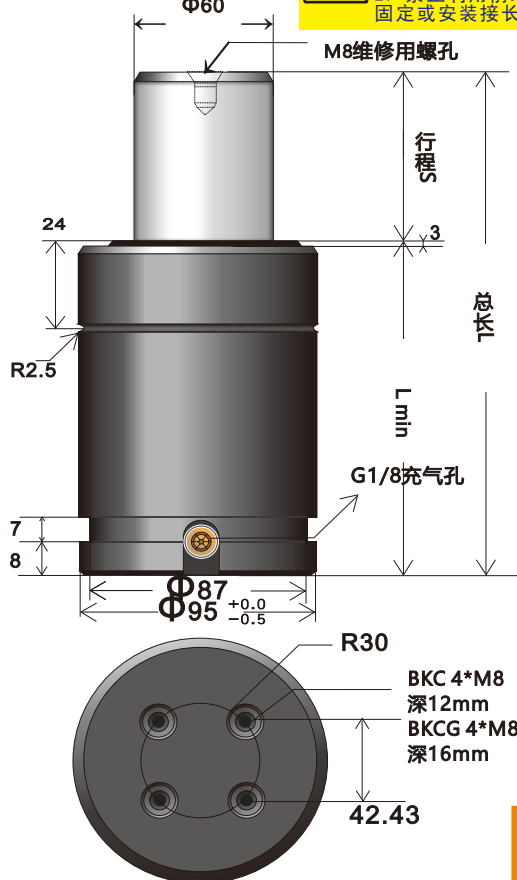


超短强力型氮气弹簧

基本技术参数

公称弹压力....42000N
最大充气压强...15Mpa
最小充气压强...2.5Mpa
最大工作速度...≤0.8m/s
工作介质....氮气 (N₂)
工作温度范围...-20 ~ +80℃
单位温度压力变化率...±0.3%/℃
推荐工作频率...6 ~ 30次/min

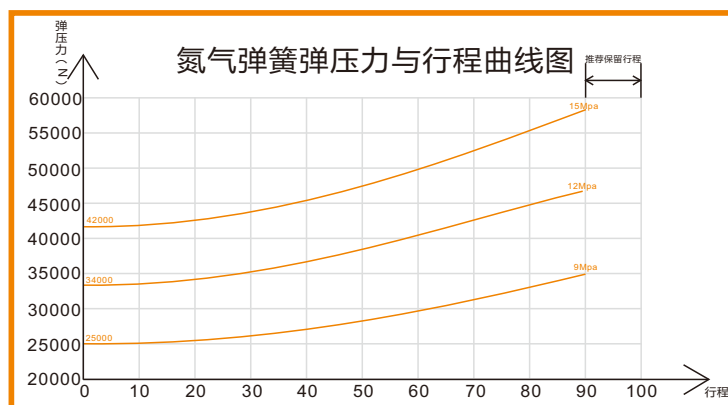

安装方法:

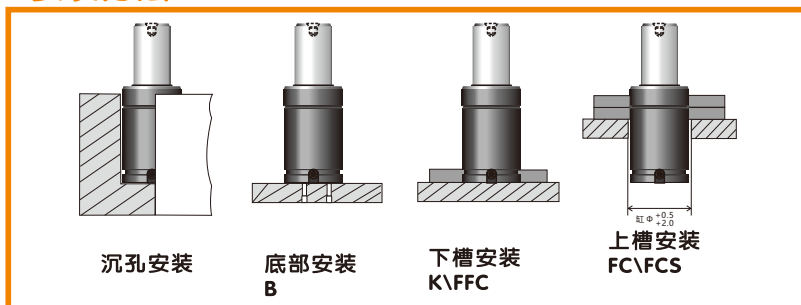


规格型号	行程	总长L	Lmin
BKC42.0-016-090	16	90	74
BKC42.0-019-096	19	96	77
BKC42.0-025-108	25	108	83
BKC42.0-032-122	32	122	90
★BKC42.0-035-128	35	128	93
BKC42.0-038-134	38	134	96
★BKC42.0-040-138	40	138	98
★BKC42.0-045-148	45	148	103
BKC42.0-050-158	50	158	108
★BKC42.0-055-168	55	168	113
★BKC42.0-060-178	60	178	118
BKC42.0-063-184	63	184	121
BKC42.0-075-208	75	208	133
BKC42.0-080-218	80	218	138
★BKC42.0-090-238	90	238	148
BKC42.0-100-258	100	258	158
BKC42.0-125-308	125	308	183

规格型号	行程	总长L	Lmin
★BKCG42.0-016-094	16	94	78
★BKCG42.0-019-100	19	100	81
★BKCG42.0-025-112	25	112	87
★BKCG42.0-032-126	32	126	94
★BKCG42.0-038-138	38	138	100
★BKCG42.0-050-162	50	162	112
★BKCG42.0-063-188	63	188	125
★BKCG42.0-075-212	75	212	137
★BKCG42.0-080-222	80	222	142
★BKCG42.0-100-262	100	262	162
★BKCG42.0-125-312	125	312	187

注:带"★"型号为不常用或非标产品订购时请注意选择


MP

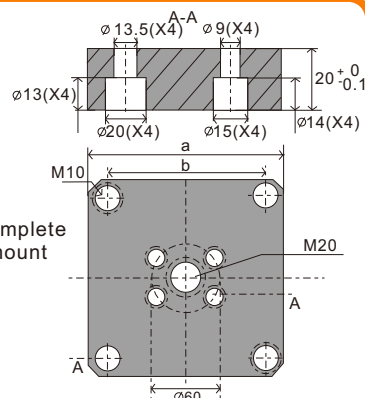

Note! Comes complete with screws to mount gas spring.


Order No	a	b
MP-3000	120	92

FC

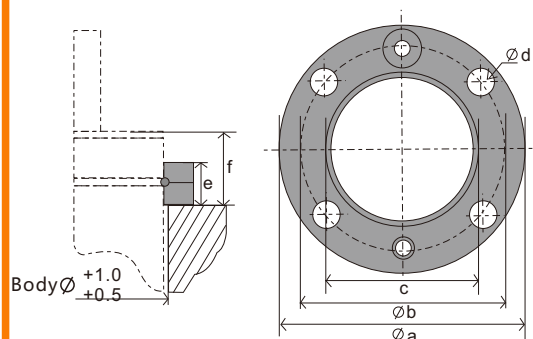


Order No	ø a	ø b	c	ø d	e	f
FC-3000	150	130	92	13.5	18	33

FCS

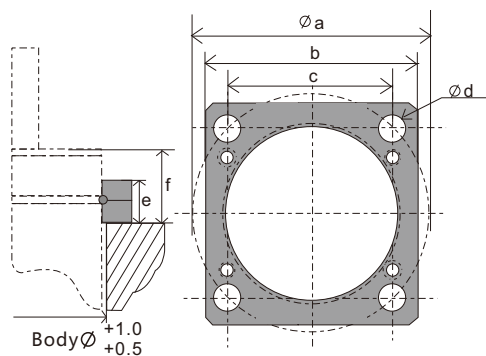

Order No	Ø a	b	c	Ø d	e	f
FCS-3000	130	110	92	13.5	18	33

FFC

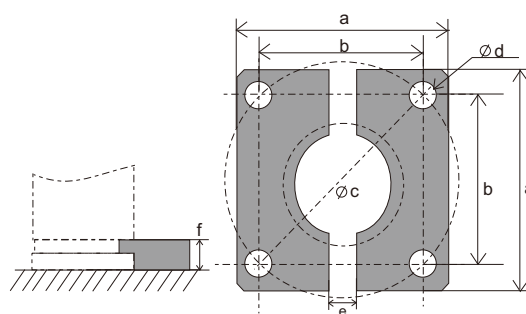

Order No	a	b	Ø c	Ø d	e	f
FFC-3000	120	92	130	13.5	24	12