


BKC/G5.0系列 5000N

BBK-JINGBA
模具氮气弹簧

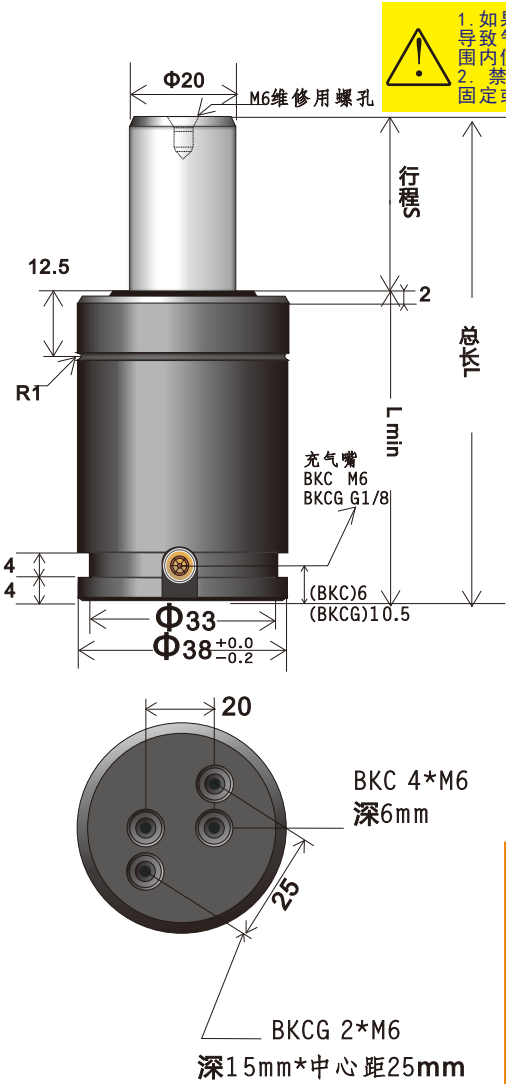


1. 如果超过行程范围S使用, 则会导致气体溢出。请务必在行程范围内使用, 以免触到泄压衬套。
2. 禁止利用前端工艺孔(M)进行固定或安装接长销。


超短强力型氮气弹簧

基本技术参数

公称弹压力...5000N
最大充气压强...15Mpa
最小充气压强...2.5Mpa
最大工作速度...≤1.2m/s
工作介质...氮气 (N₂)
工作温度范围...-20 ~ +80℃
单位温度压力变化率...±0.3%/℃
推荐工作频率...6 ~ 50次/min

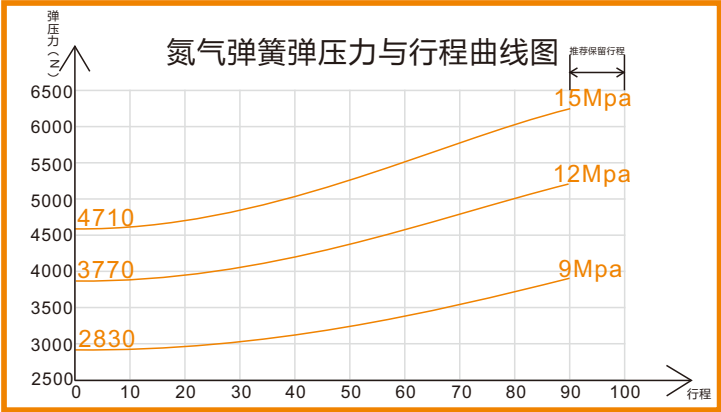

安装方法:

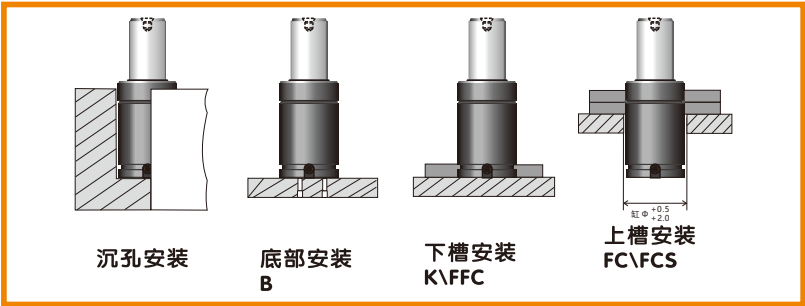


规格型号	行程	总长L	Lmin
★BKC5.0-010-050	10	50	40
BKC5.0-013-056	13	56	43
BKC5.0-016-062	16	62	46
BKC5.0-019-068	19	68	49
BKC5.0-025-080	25	80	55
BKC5.0-032-094	32	94	62
★BKC5.0-035-100	35	100	65
BKC5.0-038-106	38	106	68
★BKC5.0-040-110	40	110	70
★BKC5.0-045-120	45	120	75
BKC5.0-050-130	50	130	80
★BKC5.0-055-140	55	140	85
★BKC5.0-060-150	60	150	90
BKC5.0-063-156	63	156	93
BKC5.0-075-180	75	180	105
BKC5.0-080-190	80	190	110
★BKC5.0-090-210	90	210	120
BKC5.0-100-230	100	230	130
BKC5.0-125-280	125	280	155

规格型号	行程	总长L	Lmin
★BKCG5.0-010-060	10	60	50
★BKCG5.0-013-066	13	66	53
★BKCG5.0-016-072	16	72	56
★BKCG5.0-019-078	19	78	59
★BKCG5.0-025-090	25	90	65
★BKCG5.0-032-104	32	104	72
★BKCG5.0-038-116	38	116	78
★BKCG5.0-050-140	50	140	90
★BKCG5.0-063-166	63	166	103
★BKCG5.0-075-190	75	190	115
★BKCG5.0-080-200	80	200	120
★BKCG5.0-100-240	100	240	140
★BKCG5.0-125-290	125	290	165


注:带"★"型号为不常用或非标产品订购时请注意选择

FC

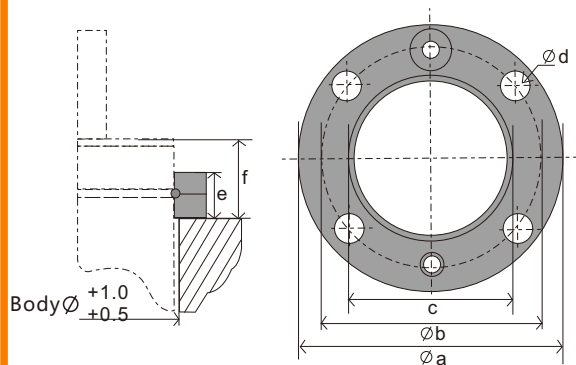


Order No	$\varnothing a$	$\varnothing b$	c	d	$\varnothing e$	f
FC-250	68	56.5	40	7	9	17

FCS

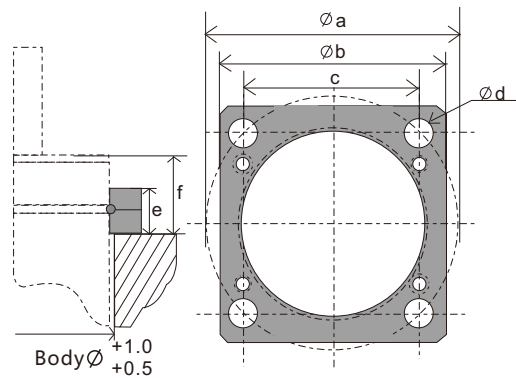

Order No	$\varnothing a$	$\varnothing b$	c	d	$\varnothing e$	f
FCS-250	56.5	52	40	7	9	17

FFC

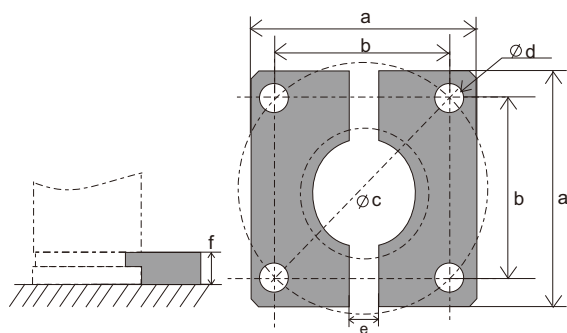

Order No	a	b	$\varnothing c$	$\varnothing d$	e	f
FFC-250	55	40	56.6	7	12	6.5