


BKC/G66.0 系列 66000N

BBK-JINGBA


模具氮气弹簧

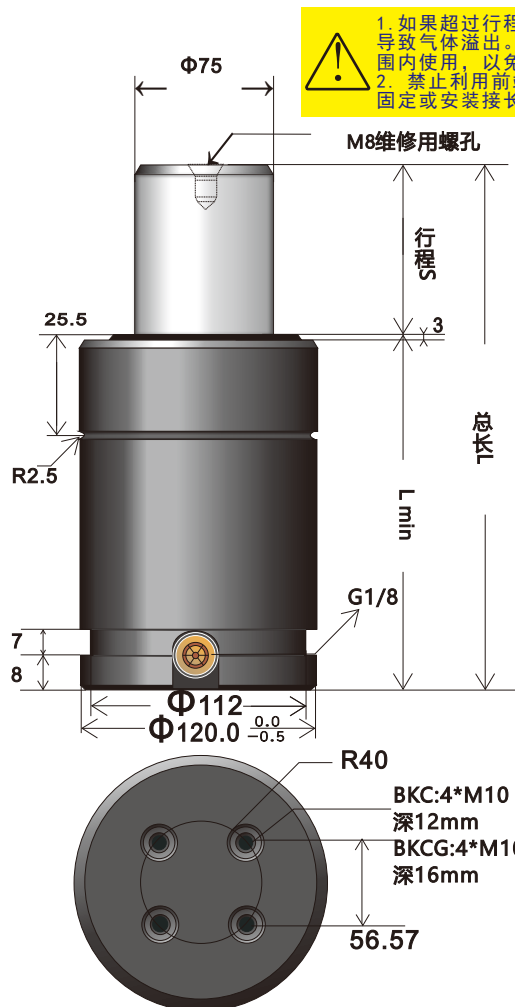


超短强力型氮气弹簧

基本技术参数

公称弹压力...66000N 工作介质...氮气 (N₂)
 最大充气压强...15Mpa 工作温度范围...-20~+80℃
 最小充气压强...2.5Mpa 单位温度压力变化率...±0.3%/℃
 最大工作速度...≤0.8m/s 推荐工作频率...6~30次/min

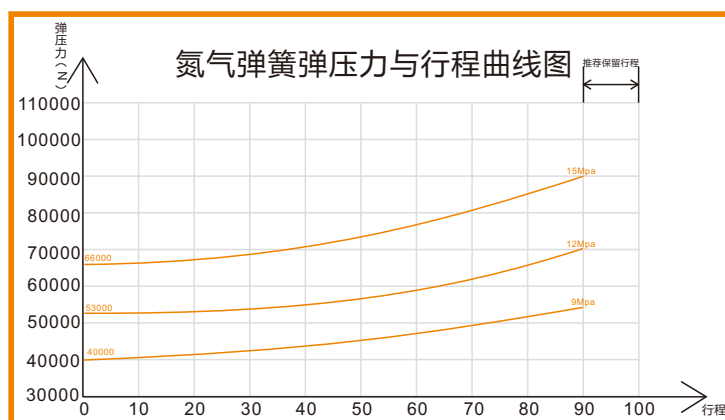

安装方法:

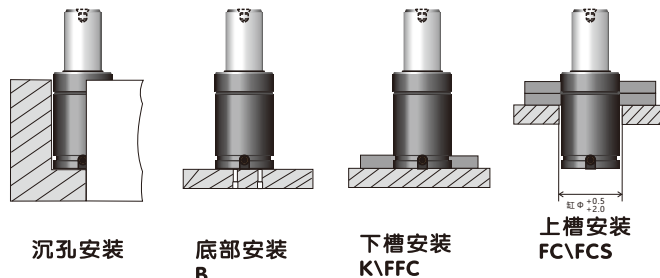

规格型号	行程	总长L	Lmin
BKC66.0-016-100	16	100	84
BKC66.0-019-106	19	106	87
BKC66.0-025-118	25	118	93
BKC66.0-032-132	32	132	100
BKC66.0-038-144	38	144	106
BKC66.0-050-168	50	168	118
BKC66.0-063-194	63	194	131
BKC66.0-075-218	75	218	143
BKC66.0-080-228	80	228	148
BKC66.0-100-268	100	268	168
BKC66.0-125-318	125	318	193

规格型号	行程	总长L	Lmin
★BKCG66.0-016-104	16	104	88
★BKCG66.0-019-110	19	110	91
★BKCG66.0-025-122	25	122	97
★BKCG66.0-032-136	32	136	104
★BKCG66.0-038-148	38	148	110
★BKCG66.0-050-172	50	172	122
★BKCG66.0-063-198	63	198	135
★BKCG66.0-075-222	75	222	147
★BKCG66.0-080-232	80	232	152
★BKCG66.0-100-272	100	272	172
★BKCG66.0-125-322	125	322	197

注:带"★"型号为不常用或非标产品订购时请注意选择

