


BKC/G 系列7500N



BBK-JINGBA
模具氮气弹簧

超短强力型氮气弹簧

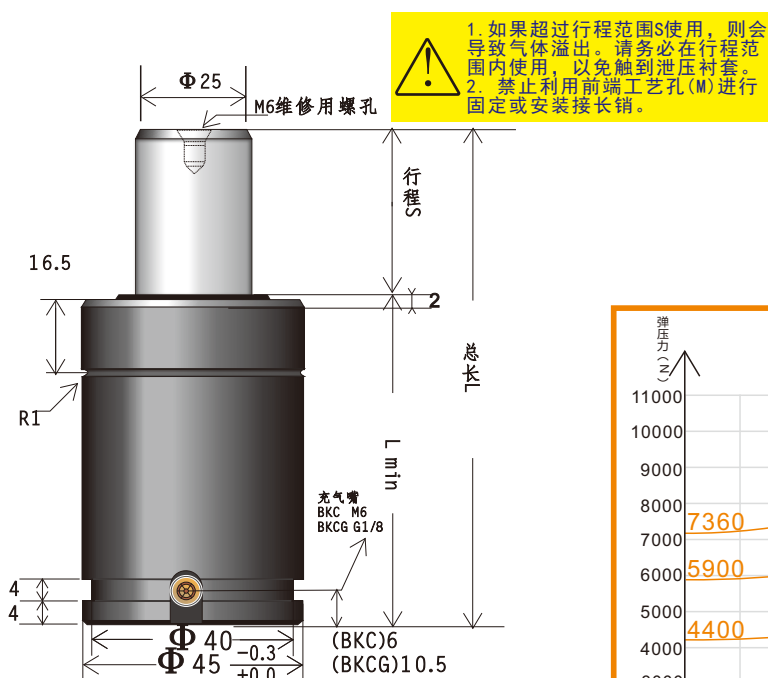


基本技术参数

公称弹压力.....7500N
最大充气压强...15Mpa
最小充气压强...2.5Mpa
最大工作速度...≤0.8m/s
工作介质....氮气 (N2)
工作温度范围..-20 ~ +80℃
单位温度压力变化率..±0.3%/℃
推荐工作频率...6 ~ 30次/min

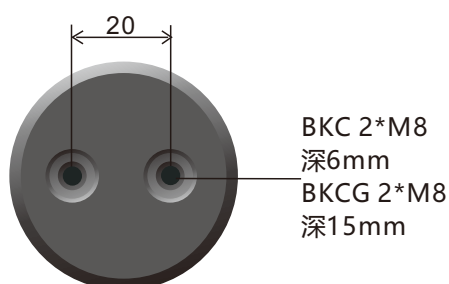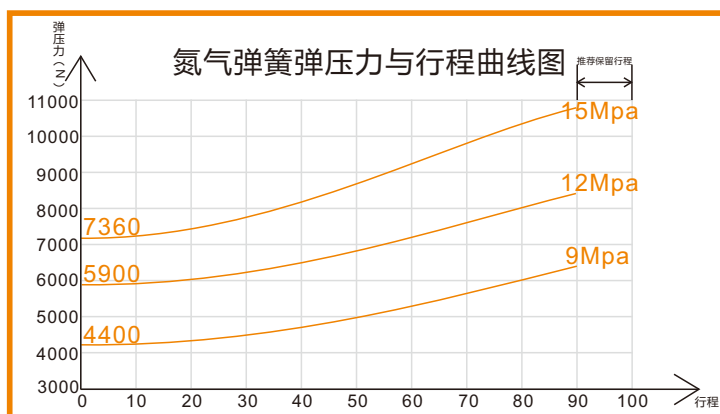

安装方法:

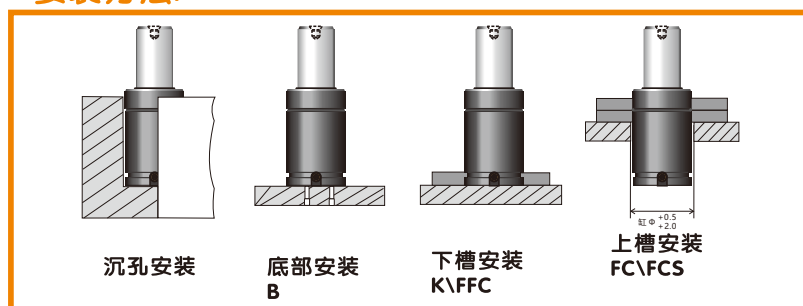


规格型号	行程	总长L	Lmin
★ BKC7.5-10-52	10	52	42
★ BKC7.5-13-58	13	58	45
BKC7.5-16-64	16	64	48
BKC7.5-19-70	19	70	51
BKC7.5-25-82	25	82	57
BKC7.5-32-96	32	96	64
★BKC7.5-35-102	35	102	67
BKC7.5-38-108	38	108	70
★BKC7.5-40-112	40	112	72
★BKC7.5-45-122	45	122	77
BKC7.5-50-132	50	132	82
★BKC7.5-55-142	55	142	87
★BKC7.5-60-152	60	152	92
BKC7.5-63-158	63	158	95
BKC7.5-75-182	75	182	107
BKC7.5-80-192	80	192	112
★BKC7.5-90-212	90	212	122
BKC7.5-100-232	100	232	132
BKC7.5-125-282	125	282	157

规格型号	行程	总长L	Lmin
★ BKCG7.5-10-67	10	67	57
★ BKCG7.5-13-73	13	73	60
★ BKCG7.5-16-79	16	79	63
★ BKCG7.5-19-85	19	85	66
★ BKCG7.5-25-97	25	97	72
★ BKCG7.5-32-111	32	111	79
★ BKCG7.5-38-123	38	123	85
★ BKCG7.5-50-147	50	147	97
★ BKCG7.5-63-173	63	173	110
★ BKCG7.5-75-197	75	197	122
★ BKCG7.5-80-207	80	207	127
★ BKCG7.5-100-247	100	247	147
★ BKCG7.5-125-297	125	297	172


注:带"★"型号为不常用或非标产品订购时请注意选择

FC

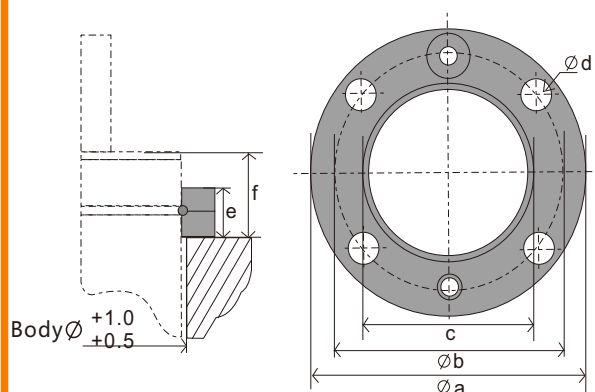


Order No	$\varnothing a$	$\varnothing b$	c	$\varnothing d$	e	f
FC-500	86	70.7	50	9	13	23

FCS

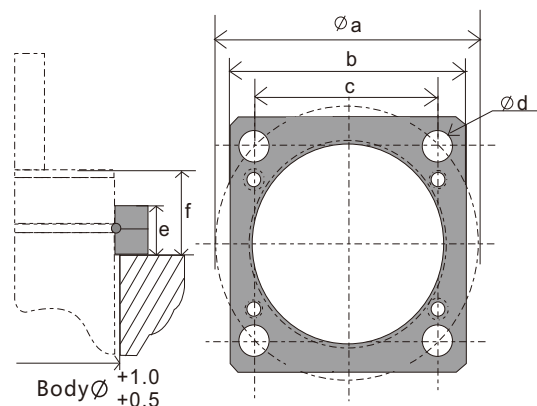

Order No	$\varnothing a$	b	c	$\varnothing d$	$\varnothing e$	f
FCS-500	70.7	64	50	9	13	23

FFC

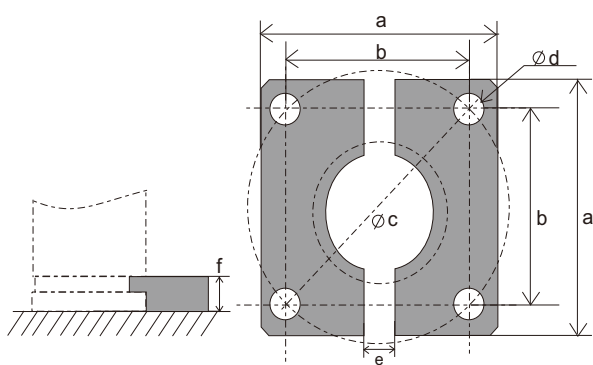

Order No	a	b	$\varnothing c$	$\varnothing d$	e	f
FFC-500	70	50	70.7	9	20	6.5